

# LIGHT-FOR-ME

light-for-me  
ACCU XS 4.4Ah  
User's manual



The following manual contains instructions regarding usage, storage and charging of light-for-me ACCU XS (+SideMount) 4.4Ah Li-Ion. We recommend reading the manual carefully and following its instructions. Acting against the manual may result in improper work of the ACCU and / or its irreversible damage.

## Charging

Before starting the charging process, make sure the ACCU XS is dry, check carefully the charging point - remove any moisture.

Check the charger - make sure the cable is not torn or cut.


To charge ACCU XS - first connect the charger to the ACCU and then to the mains.

Depending on the charger type, the following steps will take place:

1) Charger with one red LED and 3 green LEDs: Charger then will do a self-test (each green diode flash one by one) and start the charging process - each solid green diode means one third of the battery pack is charged.

Once the charging process is finished (all three green diode are on), unplug the charger form the mains, wait for the charger to go off and then disconnect it from the ACCU.

2) Charger with one red LED and one green LED: Charger will start the charging process which is indicated by the red diode on. Once the charging process is finished - indicated by greed diode being on - unplug the charger from the mains, wait for the charger to go off and disconnect it from the ACCU.

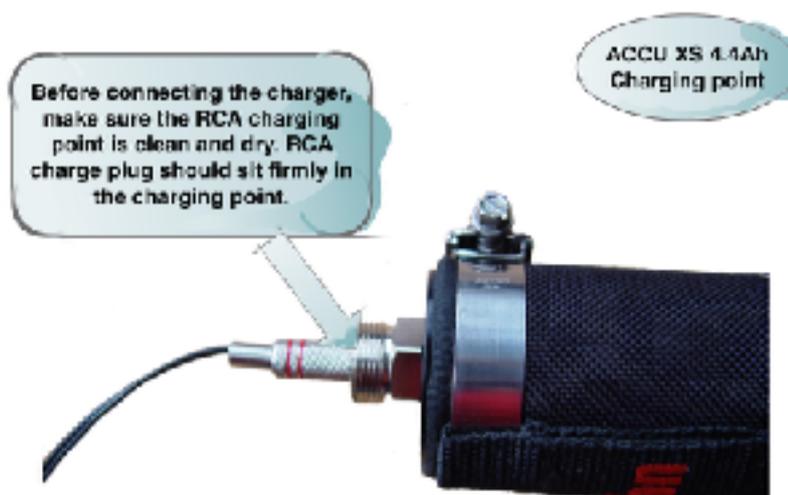


## Usage & connecting the RCA cable

Before connecting ACCU XS to light-for-me RCA head or RCA - E/O cable<sup>1</sup>, check its overall condition.

Check the oring placed in the port connection and grease it if needed. If cut or torn - replace immediately.

Slide back the rotating nut and push the cable RCA end carefully inside the ACCU's port connection / charging point (see photo). Twist the nut to the end. Check if the set works properly.

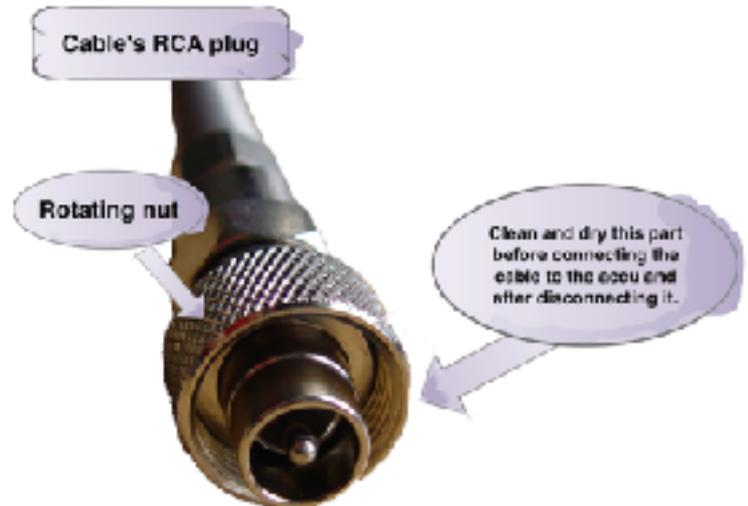

<sup>1</sup> For light-for-me RCA heads' or RCA - E/O cable's usage and storage - refer to a particular product's manual

## Storage

Rinse it after each dive, especially salt water dive. Make sure the RCA head or RCA - E/O cable is still connected - otherwise water may enter the canister through an open RCA port connection and flood it.

Dry the ACCU XS well and check its overall condition.

Light-for-me ACCU XS should be stored in a dry place.

Avoid places where moisture can enter the ACCU.

If stored with RCA head plugged in, make sure the head can't be switched on by chance.



Go to [light-for-me.com](http://light-for-me.com) for more news, new products and the latest version of the manual.